


Dual Check & Pressure Limiting Valve, 2NVPLV



2NVPLV

The new combination 2NV-PLV is the latest addition to AVG's back flow valve range and incorporates dual back flow protection with an integral adjustable Pressure Limiting Valve.

The valve has been developed predominantly to cater for the coffee machine and water filter market but is suitable for all point of use applications requiring dual back flow and pressure protection all in one compact package.

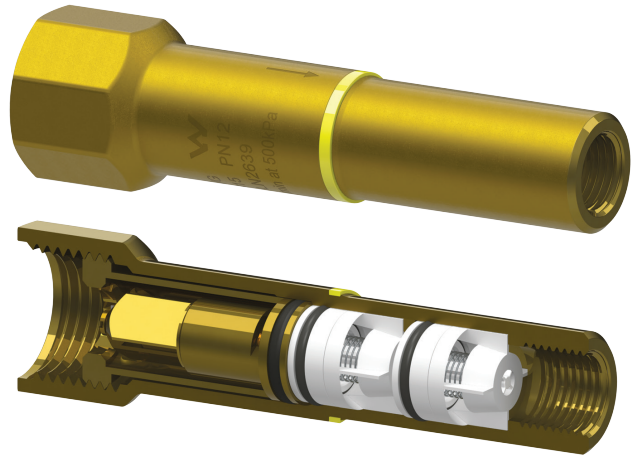


FEATURES

- Ideal for water filter and coffee machine installations
- Adjustable pressure limiting function 350kPa or 500kPa (factory set 350kPa)
- 350kPa yellow pressure indicator ring fitted and includes optional 500kPa white indicator ring
- Dual check valves
- Reduced pressure and flow helps reduce water hammer and most pipe noises
- Suitable for all point of use applications requiring back flow and pressure protection in one compact package.

SPECIFICATIONS

Body:	Nickel plated DZR brass
PLV:	DZR brass
Check valves:	POM
Inlet :	1/2" - 15mm female
Outlet:	1/4" - 6mm female
O rings:	EPDM
Pressure setting:	350kPa
Flow rate:	10 liters/min
Max temp.:	80°C
Approvals:	AS 2845.1 Watermark AS1357.2

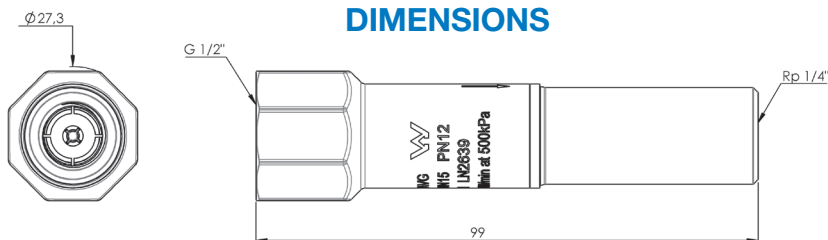

DISCLAIMER: Every care has been taken in the preparation of these instructions, which have been issued as a guide only. Compliance with the requirements of local Authorities is required at all times. These requirements may change from time to time. Always be aware of the local requirements. Subject to any statutory obligations and manufacturers warranties no liability can be accepted for any losses, consequential or otherwise which may arise or be said to have arisen from relying upon the contents of this installation instruction as to the fitness of any particular product for any particular purpose, use or application. The Australian Valve Group Pty Ltd reserves the right to modify designs and specifications and to withdraw and introduce products at any time without notice.